

# Fine Fissured and Fine Fissured High Acoustic


**Armstrong**<sup>®</sup>  
CEILING SOLUTIONS

## Benefits

- Total Acoustics™ Performance (NRC+CAC)
  - High sound absorption for reduced reverberation and quieter spaces
  - High sound attenuation, improving room to room privacy
- Cost effective ceiling solution
- Reliable, proven performance
- High light reflective finish
- RH99 Humidity Resistant
- Sustainable – Green Star® contribution

## Application Areas

- Offices
- Education
- Healthcare
- Corridors
- Libraries

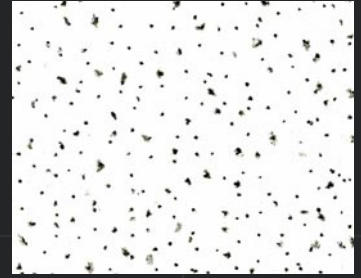

12 MARCH 2025

FINE FISSURED



Fine Fissured Square Edge with PeakForm™ Prelude™ XL 24mm Exposed Tee grid

# Fine Fissured and Fine Fissured High Acoustic



RH99  
Humidity  
Resistant



42-61%  
Recycled Content  
EN ISO 14021



85%  
Light Reflectance



Acoustical  
Comfort



Total  
Acoustics

Panel Options	BOARD	TEGULAR 24	BEVELLED TEGULAR 15	
	Prelude™ 24mm Grid	Prelude 24mm Grid	Suprafine™ 15mm Grid	Silhouette™ 15mm Grid
<b>Fine Fissured</b>				
48 x 24 x 7/11in	1730	*	*	
600 x 600 x 16mm	3510	3572	1734	
1200 x 600 x 16mm	3570	3574	1739	
<b>Fine Fissured High NRC</b>				
600 x 600 x 20mm	4120	4122	*	
1200 x 600 x 20mm	4121	4123	*	
<b>Fine Fissured High NRC / CAC</b>				
600 x 600 x 19mm	1713	1720	*	
1200 x 600 x 19mm	1714	1724	*	

\* Special item on request. Other sizes and profiles, including K2C2 edge for semi-concealed grid systems upon request.

\*\* Contact your local Armstrong Ceilings representative for stock availability and details of specific items certified by Green Tag.



EN ISO 354 &  
EN ISO 11654

NRC: 0.60 (Fine Fissured)  
0.70 (Fine Fissured High NRC and High NRC / CAC)



EN ISO 10848-2  
& EN ISO 717-1

CAC: 35 (Fine Fissured and Fine Fissured High NRC)  
40 (Fine Fissured High NRC / CAC)



RH99% at 0°C – 49°C



Conforms with NCC Spec. C1.10 as tested to AS  
5637.1:2015 – Group 1, and ISO 5660 – Group 1 – S



Thermal Insulation (R- Value)  
0.28 m<sup>2</sup>K/W



3.6 kg/m<sup>2</sup> (Fine Fissured)  
5.0 kg/m<sup>2</sup> (Fine Fissured High NRC)  
5.5 kg/m<sup>2</sup> (Fine Fissured High NRC / CAC)

#### Material

Wet-formed mineral fibre

#### Surface Finish

Factory applied acrylic paint

#### Backloading Recommendation

Contact your local Armstrong  
Ceilings representative

#### Recycled Content

42% for Fine Fissured, 61% for Fine  
Fissured High NRC and 43% for  
Fine Fissured High NRC / CAC

#### Suspension Systems

PeakForm™ Steel options above,  
with ARMSTRONG BLUE TONGUE™  
Aluminium upon request

#### Green Star™: Potential contribution Interiors v1.3 / Design & As Built v1.3

Indoor Environmental Quality				Materials	
Credit 9/10 ACOUSTIC COMFORT	Credit 10.2A/11.2A LIGHTING COMFORT SURFACE ILLUMINANCE	Credit 11.1B/12.1B VISUAL COMFORT: DAYLIGHT	Credit 12/13 INDOOR POLLUTANTS	Credit 21D/21D SUSTAINABLE PRODUCTS – “Level A” Third Party Certification	Credit 22/22 CONSTRUCTION AND DEMOLITION WASTE
✓	✓	✓	✓	✓	✓



## Contact us

Armstrong Ceiling Solutions (Australia) Pty. Ltd.

**NSW / ACT**  
(02) 9748 1588

**VIC / TAS**  
(03) 8706 4000

**QLD / NT**  
(07) 3809 5565



info@armstrongceilings.com.au

www.armstrongceilings.com.au